
itc · SIMULTANEOUS INTERPRETATION

TS-0370HY

Interpreter Unit

The itc TS-0370HY is an interpreter Unit from itc's Simultaneous Interpretation range, built for council chambers, boardrooms, government and university meeting halls, courts and conference centres.

Key figures: frequency response 80Hz~16KHz; sensitivity -41±1.5dB (0dB=1V/Pa,at 1KHz); display screen 7 inch resistive touch screen. Highlights include knob type plug microphone pole.

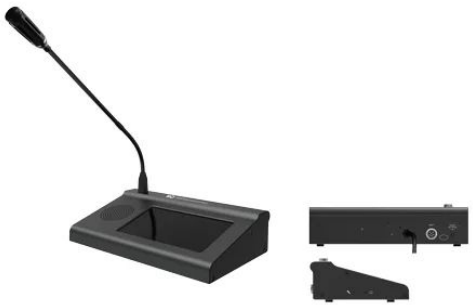

Key features

- Original clock synchronization and transmission technology — Original clock synchronization and transmission technology, audio delay is less than 5ms, sampling rate 48K uncompressed audio transmission. The Cat5e shield cable
- Support 5-band EQ adjustment function. Different sound… — Support 5-band EQ adjustment function. Different sound effects can be adjusted according to the voice characteristics of the speaker until the perfect effect is achieved.
- 7-inch touch color screen, delicate UI interface;
- Knob type plug microphone pole — Knob type plug microphone pole, dual color indicator light, red light indicates speaking;
- With internal magnetic speaker — With internal magnetic speaker, earphone jack and volume adjustment knob;

Technical specifications

Model	TS-0370HY
Microphone type	Cardioid electret
Frequency response	80Hz~16KHz
Microphone input impedance	680Ω
Sensitivity	-41±1.5dB (0dB=1V/Pa,at 1KHz)
S NR	>80dB(A)
Dynamic range	>80dB
THD	<0.01%
Maximum power consumption	4W
Power supply	Aviation connector power supply/DC 36V power supply
Colour	Black
Display screen	7 inch resistive touch screen
Dimension (LxWxH)	268*160.83*70mm(excluding the length of the microphone pole)
Microphone rod length	409mm
Installation	Desktop