
itc · CONFERENCE & COLUMN LOUDSPEAKERS

TS-608/TS-610/TS-612/TS-615

Professional Speaker

The itc TS-608 family is a professional Speaker from itc's Conference & Column Loudspeakers range, built for speech and music reinforcement in conference rooms, banquet halls, theatres, KTV and multipurpose venues. It is offered in 2 versions — TS-608, TS-610 — so one design language covers rooms of different sizes.

Key figures: rated power 200W / 300W; rated power 350W / 450W; peak power 800W / 1200W. Highlights include strong and wear-resistant cabinet and frequency divider in precise design.

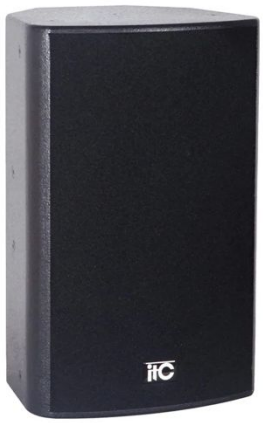

Key features

- One mid-woofer and one circular polyethylene diaphragm compressed tweeter
- Strong and wear-resistant cabinet — 15mm plywood housing Wear-resistant spray paint treatment Dust-proof net cotton outside
- Frequency divider in precise design — Optimize the vocal MF performance
- Multiple screw hoisting holes for various installation methods

Technical specifications

Versions: TS-608 · TS-610 (values in the same order)

Impedance	8Ω
Frequency response	60Hz~20KHz / 55Hz~20KHz
Rated power	200W / 300W
Peak Power	800W / 1200W
Sensitivity	96dB/W/M / 98dB/W/M
Max SPL(rated/peak)	119dB/126dB / 123dB/129dB
Coverage angle	(H)80° (V)60°
Tweeter	1.4″ compressed tweeter × 1 / 1.4″ compressed tweeter ×1
Woofer	8″ woofer × 1 / 10″ woofer ×1
Dimension (H×W×D)	246×243×442 / 322×295×512
Weight	9.5kg / 15.2Kg
Model	TS-612 / TS-615
Impedance	8Ω
Frequency response	50Hz~20KHz / 45Hz~20KHz
Rated power	350W / 450W
Peak Power	1400W / 1800W
Sensitivity	99dB/W/M / 100dB/W/M
Max SPL(rated/peak)	124dB/131dB / 127dB/133dB
Coverage angle	(H)80° (V)60° / (H)80°(V)60°

Continued specifications on request.