
itc · CONFERENCE & COLUMN LOUDSPEAKERS

TS-610P/TS-612P/TS-615P

Professional Speaker

The itc TS-610P family is a professional Speaker from itc's Conference & Column Loudspeakers range, built for speech and music reinforcement in conference rooms, banquet halls, theatres, KTV and multipurpose venues. It is offered in 3 versions — TS-610P, TS-612P, TS-615P — so one design language covers rooms of different sizes.

Key figures: rated power 300W / 350W / 450W; peak power 1200W / 1400W / 1800W; power supply AC 220V 50Hz. Highlights include rated power 300W / 350W / 450W, nominal impedance 8Ω / 4Ω, frequency response 55Hz / 50Hz / 45Hz -20KHz and sensitivity 98dB / 99dB / 100dB (1M/1W).

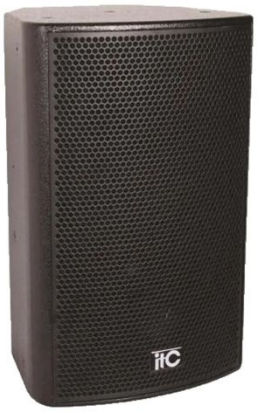

Key features

- Rated power 300W / 350W / 450W — Rated power 300W / 350W / 450W
- Nominal impedance 8Ω / 4Ω — Nominal impedance 8Ω / 4Ω
- Frequency response 55Hz / 50Hz / 45Hz -20KHz — Frequency response 55Hz / 50Hz / 45Hz -20KHz
- Sensitivity 98dB / 99dB / 100dB (1M/1W) — Sensitivity 98dB / 99dB / 100dB (1M/1W)

Technical specifications

Versions: TS-610P · TS-612P · TS-615P (values in the same order)

Impedance	8Ω / 4Ω / 4Ω
Frequency response	55Hz-20KHz / 50Hz-20KHz / 45Hz-20KHz
Rated power	300W / 350W / 450W
Peak power	1200W / 1400W / 1800W
Sensitivity	98dB/W/M / 99dB/W/M / 100dB/W/M
Max SPL(rated/peak)	123dB/129dB / 124dB/130dB / 127dB/133dB
Coverage angle	(H)80° (V)60°
Tweeter	1.4″ compressed tweeter ×1 / 1.7″ compressed tweeter ×1 / 1.73″ compressed tweeter ×1
Woofer	10″ woofer ×1 / 12″ woofer ×1 / 15″ woofer ×1
Line input sensitivity	0dB
Dimension (H×W×D)	510×325×300mm / 560×360×380mm / 660×435×430mm
Weight	18.5Kg / 21.8Kg / 28.8Kg
Power supply	AC 220V 50Hz
Power consumption	240W / 280W / 360W